

LM431 Adjustable Precision Zener Shunt Regulator

General Description


The LM431 is a 3-terminal adjustable shunt regulator with guaranteed temperature stability over the entire temperature range of operation. The output voltage may be set at any level greater than 2.5V (V_{REF}) up to 36V merely by selecting two external resistors that act as a voltage divided network. Due to the sharp turn-on characteristics this device is an excellent replacement for many zener diode applications.

Features

- Average temperature coefficient 50 ppm/°C
- Temperature compensated for operation over the full temperature range
- Programmable output voltage
- Fast turn-on response
- Low output noise

Connection Diagrams


TO-92: Plastic Package



Top View

Order Number **LM431ACZ**,
LM431AIZ,
LM431BCZ, **LM431BIZ**, **LM431CCZ**
or **LM431CIZ**


SO-8: 8-Pin Surface Mount



Top View

Order Number **LM431ACM**,
LM431AIM,
LM431BCM, **LM431BIM**, **LM431CCM**
or **LM431CIM**

SOT-23: 3-Lead Small Outline



Top View

Order Number **LM431ACM3**,
LM431AIM3,
LM431BCM3, **LM431BIM3**,
LM431CCM3
or **LM431CIM3**

Ordering Information*

| Package | Typical Accuracy | | | Temperature Range |
|---------|------------------------|------------------------|------------------------|--------------------------------|
| | 0.5% | 1% | 2% | |
| TO-92 | LM431CCZ LM431CIZ | LM431BCZ LM431BIZ | LM431ACZ LM431AIZ | 0°C to +70°C -40°C to +85°C |
| SO-8 | LM431CCM LM431CIM | LM431BCM LM431BIM | LM431ACM LM431AIM | 0°C to +70°C -40°C to +85°C |
| SOT-23 | LM431CCM3 LM431CIM3 | LM431BCM3 LM431BIM3 | LM431ACM3 LM431AIM3 | 0°C to +70°C -40°C to +85°C |

*See Table 1 for package marking for SOT-23.

6501124 0105927 133

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|--|-----------------|
| Storage Temperature Range | -65°C to +150°C |
| Operating Temperature Range | |
| Industrial (LM431xI) | -40°C to +85°C |
| Commercial (LM431xC) | 0°C to +70°C |
| Lead Temperature | |
| TO-92 Package/SO-8 Package/SOT-23 Package (Soldering, 10 sec.) | 265°C |
| Internal Power Dissipation (Notes 1, 2) | |
| TO-92 Package | 0.78W |
| SO-8 Package | 0.81W |
| SOT-23 Package | 0.28W |

| | | |
|----------------------------|-------------------|------------|
| Cathode Voltage | | 37V |
| Continuous Cathode Current | -10 mA to +150 mA | |
| Reference Voltage | -0.5V | |
| Reference Input Current | 10 mA | |
| Operating Conditions | Min | Max |
| Cathode Voltage | V _{REF} | 37V |
| Cathode Current | 1.0 mA | 100 mA |

Note 1: T_J Max = 150°C.

Note 2: Ratings apply to ambient temperature at 25°C. Above this temperature, derate the TO-92 at 6.2 mW/°C, the SO-8 at 6.5 mW/°C, and the SOT-23 at 2.2 mW/°C.

LM431

Electrical Characteristics T_A = 25°C unless otherwise specified


| Symbol | Parameter | Conditions | Min | Typ | Max | Units | |
|-------------------------------------|---|--|---|-------|-------|-------|------|
| V _{REF} | Reference Voltage | V _Z = V _{REF} , I _I = 10 mA LM431A (Figure 1) | 2.440 | 2.495 | 2.550 | V | |
| | | V _Z = V _{REF} , I _I = 10 mA LM431B (Figure 1) | 2.470 | 2.495 | 2.520 | V | |
| | | V _Z = V _{REF} , I _I = 10 mA LM431C (Figure 1) | 2.485 | 2.500 | 2.510 | V | |
| V _{DEV} | Deviation of Reference Input Voltage Over Temperature (Note 3) | V _Z = V _{REF} , I _I = 10 mA, T _A = Full Range (Figure 1) | | 8.0 | 17 | mV | |
| $\frac{\Delta V_{REF}}{\Delta V_Z}$ | Ratio of the Change in Reference Voltage to the Change in Cathode Voltage | I _Z = 10 mA (Figure 2) | V _Z from V _{REF} to 10V | | -1.4 | -2.7 | mV/V |
| | | V _Z from 10V to 36V | | -1.0 | -2.0 | | |
| I _{REF} | Reference Input Current | R ₁ = 10 kΩ, R ₂ = ∞, I _I = 10 mA (Figure 2) | | 2.0 | 4.0 | μA | |
| α I _{REF} | Deviation of Reference Input Current over Temperature | R ₁ = 10 kΩ, R ₂ = ∞, I _I = 10 mA, T _A = Full Range (Figure 2) | | 0.4 | 1.2 | μA | |
| I _{Z(MIN)} | Minimum Cathode Current for Regulation | V _Z = V _{REF} (Figure 1) | | 0.4 | 1.0 | mA | |
| I _{Z(OFF)} | Off-State Current | V _Z = 36V, V _{REF} = 0V (Figure 3) | | 0.3 | 1.0 | μA | |
| r _Z | Dynamic Output Impedance (Note 4) | V _Z = V _{REF} , LM431A, Frequency = 0 Hz (Figure 1) | | | 0.75 | Ω | |
| | | V _Z = V _{REF} , LM431B, LM431C Frequency = 0 Hz (Figure 1) | | | 0.50 | Ω | |

6501124 0105928 07T

LM431

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise specified (Continued)

Note 3: Deviation of reference input voltage, V_{DEV} , is defined as the maximum variation of the reference input voltage over the full temperature range.

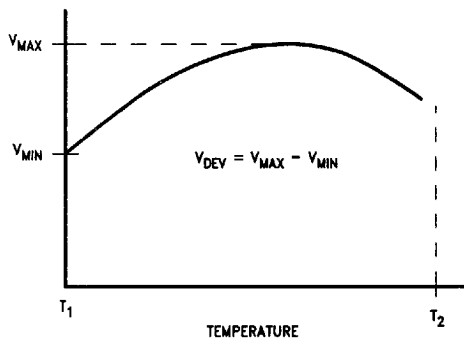

TL/H/10055-7

The average temperature coefficient of the reference input voltage, αV_{REF} , is defined as:

$$\alpha V_{REF} \frac{\text{ppm}}{^\circ\text{C}} = \frac{\pm \left[\frac{V_{MAX} - V_{MIN}}{V_{REF}(\text{at } 25^\circ\text{C})} \right] 10^6}{T_2 - T_1} = \pm \left[\frac{V_{DEV}}{V_{REF}(\text{at } 25^\circ\text{C})} \right] 10^6$$

Where:

$T_2 - T_1 =$ full temperature change.

αV_{REF} can be positive or negative depending on whether the slope is positive or negative.

Example: $V_{DEV} = 8.0 \text{ mV}$, $V_{REF} = 2495 \text{ mV}$, $T_2 - T_1 = 70^\circ\text{C}$, slope is positive.

$$\alpha V_{REF} = \frac{\left[\frac{8.0 \text{ mV}}{2495 \text{ mV}} \right] 10^6}{70^\circ\text{C}} = +46 \text{ ppm}/^\circ\text{C}$$


Note 4: The dynamic output impedance, r_z , is defined as:

$$r_z = \frac{\Delta V_Z}{\Delta I_Z}$$

When the device is programmed with two external resistors, R_1 and R_2 , (see Figure 2), the dynamic output impedance of the overall circuit, r_z , is defined as:


$$r_z = \frac{\Delta V_Z}{\Delta I_Z} \approx \left[r_z \left(1 + \frac{R_1}{R_2} \right) \right]$$

Equivalent Circuit

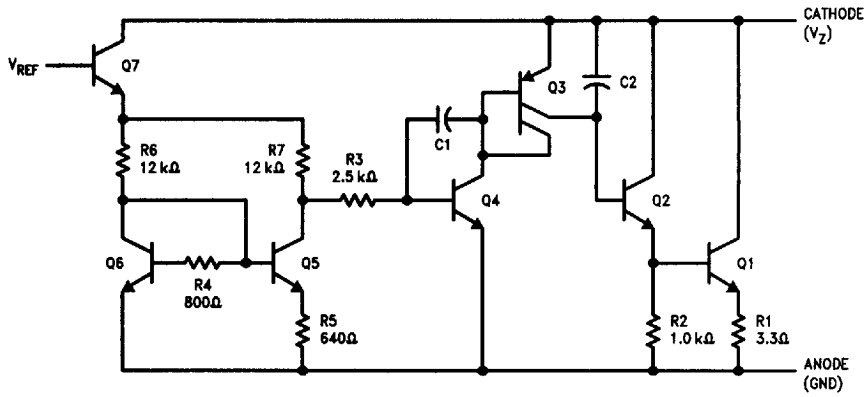


TL/H/10055-3

DC Test Circuits



TL/H/10055-4


FIGURE 1. Test Circuit for $V_Z = V_{REF}$



TL/H/10055-5

Note: $V_Z = V_{REF} (1 + R1/R2) + I_{REF} \cdot R1$

FIGURE 2. Test Circuit for $V_Z > V_{REF}$








TL/H/10055-6

FIGURE 3. Test Circuit for Off-State Current


6501124 0105930 728

Typical Performance Characteristics



TL/H/10055-9


TL/H/10055-10

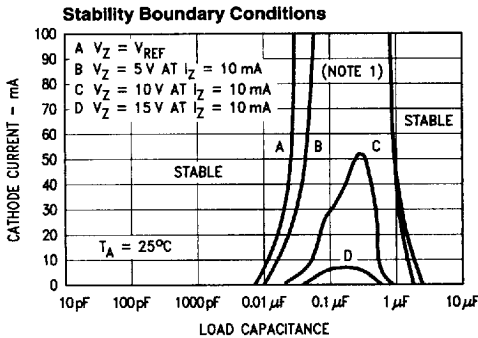

TL/H/10055-11


Note 1: The areas under the curves represent conditions that may cause the device to oscillate. For curves B, C, and D, R₂ and V⁺ were adjusted to establish the initial V_Z and I_Z conditions with C_L = 0. V⁺ and C_L were then adjusted to determine the ranges of stability.

Test Circuit for Curve A Above



TL/H/10055-12


Test Circuit for Curves B, C and D Above

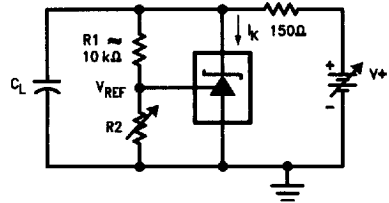

TL/H/10055-13

Typical Applications


Shunt Regulator

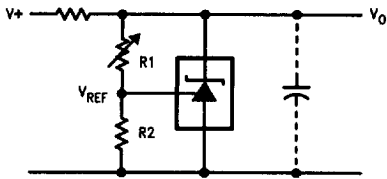

TL/H/10055-14

$$V_O \approx \left(1 + \frac{R1}{R2}\right) V_{REF}$$


Series Regulator

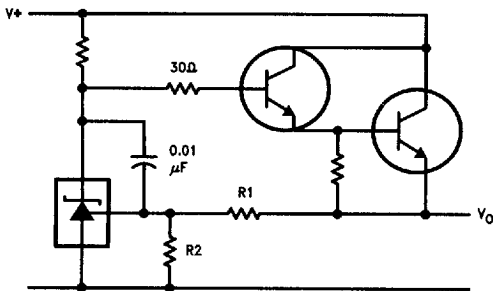

TL/H/10055-16


$$V_O \approx \left(1 + \frac{R1}{R2}\right) V_{REF}$$

Single Supply Comparator with Temperature Compensated Threshold



TL/H/10055-15

Output Control of a Three Terminal Fixed Regulator



TL/H/10055-17


$$V_O = \left(1 + \frac{R1}{R2}\right) V_{REF}$$

$$V_{O\ MIN} = V_{REF} + 5V$$

6501124 0105932 5T0

Typical Applications (Continued)


Higher Current Shunt Regulator

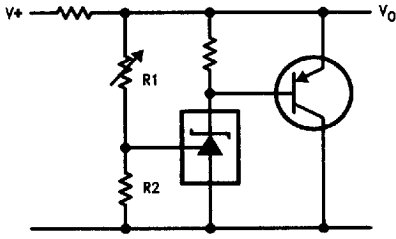

TL/H/10055-18

$$V_O = \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$


Crow Bar

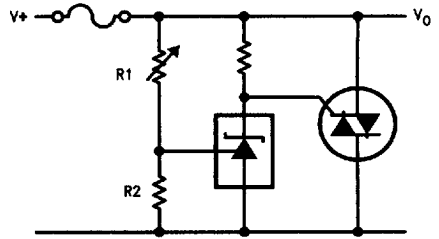

TL/H/10055-19

$$V_{LIMIT} \approx \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$

Over Voltage/Under Voltage Protection Circuit

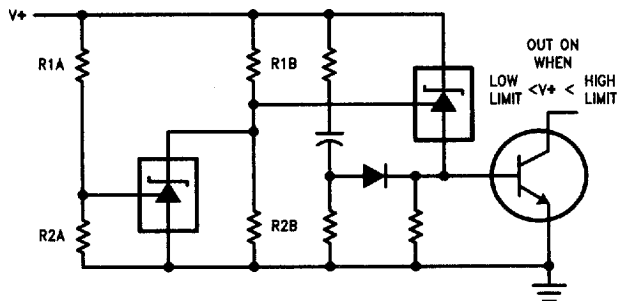


TL/H/10055-20

$$\text{LOW LIMIT} \approx V_{REF} \left(1 + \frac{R_{1B}}{R_{2B}}\right) + V_{BE}$$

$$\text{HIGH LIMIT} \approx V_{REF} \left(1 + \frac{R_{1A}}{R_{2A}}\right)$$

Voltage Monitor

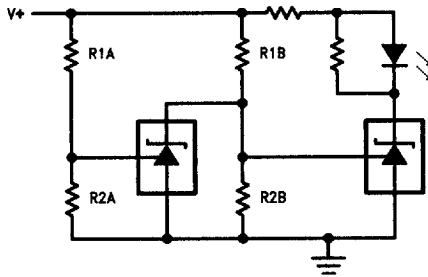


TL/H/10055-21

$$\text{LOW LIMIT} \approx V_{REF} \left(1 + \frac{R_{1B}}{R_{2B}}\right) \quad \text{LED ON WHEN LOW LIMIT} < V^+ < \text{HIGH LIMIT}$$


$$\text{HIGH LIMIT} \approx V_{REF} \left(1 + \frac{R_{1A}}{R_{2A}}\right)$$

Typical Applications (Continued)

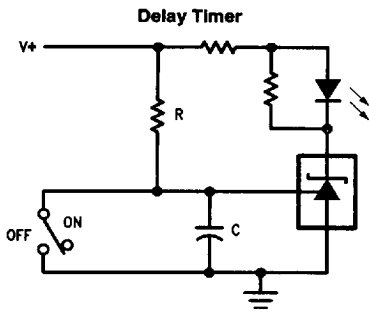

TL/H/10055-22


$$I_o = \frac{V_{REF}}{R_{CL}}$$

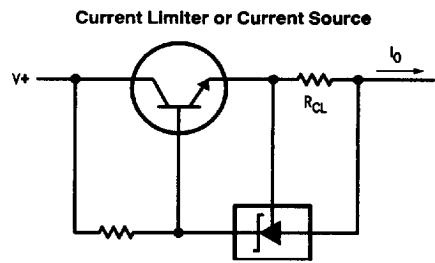

TL/H/10055-23


$$DELAY = R \cdot C \cdot \ln \frac{V^+}{(V^+) - V_{REF}}$$

Constant Current Sink



TL/H/10055-24

Recommended Solder Pads for SOT-23 Package



TL/H/10055-27




TABLE 1. Package Marking for SOT-23

| Order Number | Top Mark |
|--------------|----------|
| LM431ACM3 | N1F |
| LM431AIM3 | N1E |
| LM431BCM3 | N1D |
| LM431BIM3 | N1C |
| LM431CCM3 | N1B |
| LM431CIM3 | N1A |





6501124 0105934 373

<http://www.national.com>

Physical Dimensions inches (millimeters) unless otherwise noted

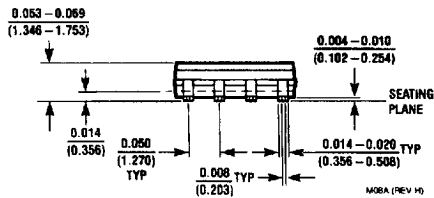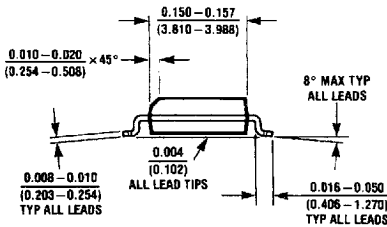

**Order Number LM431ACM or LM431AIM
NS Package Number M08A**

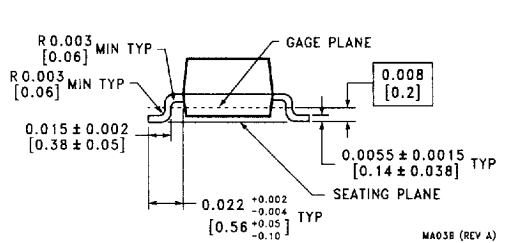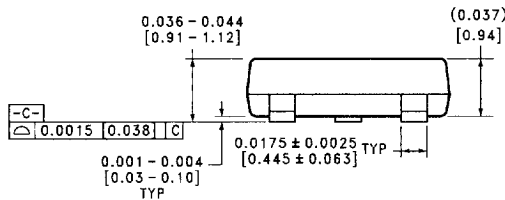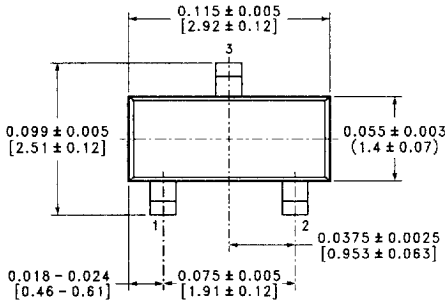


**SOT-23 Molded Small Outline Transistor Package (M3)
Order Number LM60BIM3 or LM60CIM3
NS Package Number MA03B**

6501124 0105935 20T

<http://www.national.com>

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

Lit # 106475-001

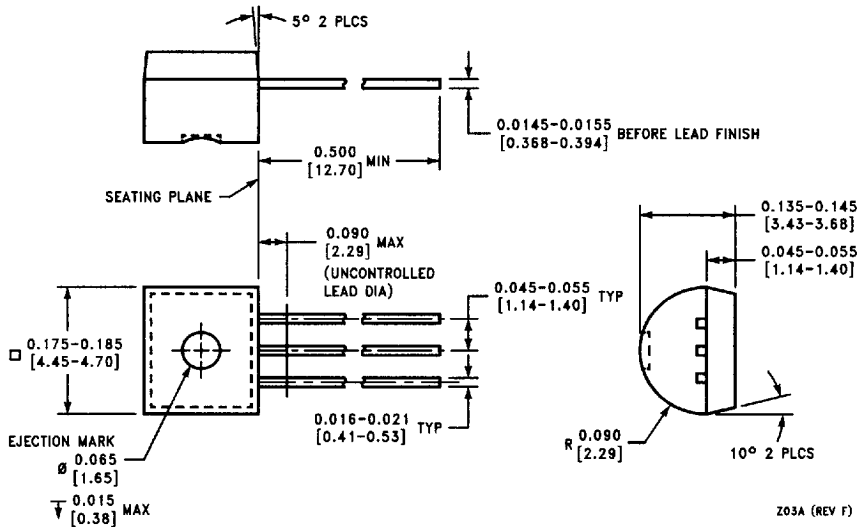

Order Number LM431ACZ or LM431AIZ
NS Package Number Z03A

Z03A (REV F)

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor Corporation
 1111 West Bardin Road
 Arlington, TX 76017
 Tel: 1(800) 272-9959
 Fax: 1(800) 737-7018

National Semiconductor Europe
 Fax: +49 (0) 180-530 85 86
 Email: europe.support@nsc.com
 Deutsch Tel: +49 (0) 180-530 85 85
 English Tel: +49 (0) 180-532 78 32
 Français Tel: +49 (0) 180-532 93 58
 Italiano Tel: +49 (0) 180-534 16 80

National Semiconductor Hong Kong Ltd.
 13th Floor, Straight Block,
 Ocean Centre, 5 Canton Rd.
 Tsimshatsui, Kowloon
 Hong Kong
 Tel: (852) 2737-1600
 Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
 Tel: 81-043-299-2308
 Fax: 81-043-299-2408

<http://www.national.com>

51393

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.