


## Metal Film Resistors

# Flame-Proof Type

## Normal & Miniature Style [ FMF Series ]

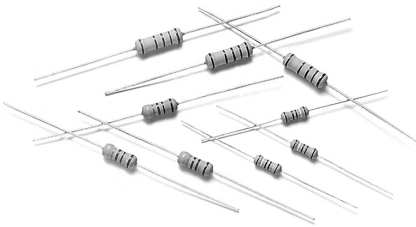

### FEATURES

Power Rating	1/4W, 1/2W, 1W, 2W, 3W
Resistance Tolerance	±1%
T.C.R.	±50ppm/°C, ±100ppm/°C
Flameproof Multi-layer Coating Meets	UL-94V-0
Flameproof Feature Meets Overload Test	UL-1412


### INTRODUCTION

The FMF Series Flame Proof Resistors are manufactured using vacuum sputtering system to deposit multiple layers of mixed metals alloy and passivative materials onto a carefully treated high grade ceramic substrate. After a helical groove has been cut in the resistive layer, tinned connecting leads of electrolytic copper are welded to the end-caps. The resistors are coated with layers of gray color lacquer.

### DERATING CURVE

For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with the curve below.


Rated Load (%)

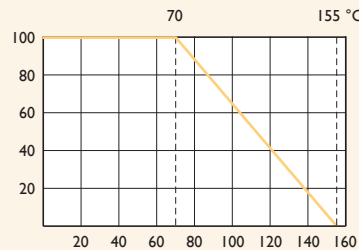

Ambient Temperature (°C)

### DIMENSIONS

Unit: mm

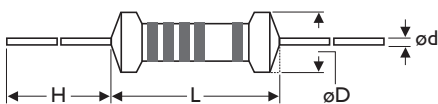

STYLE		DIMENSION			
Normal	Miniature	L	øD	H	ød
FMF-25	FMF50S	6.3±0.5	2.4±0.2	28±2.0	0.55±0.05
FMF-50	FMF1WS	9.0±0.5	3.3±0.3	26±2.0	0.55±0.05
FMF100	FMF2WS	11.5±1.0	4.5±0.5	35±2.0	0.8±0.05
FMF200	FMF3WS	15.5±1.0	5.0±0.5	33±2.0	0.8±0.05

Note:

## ELECTRICAL CHARACTERISTICS

STYLE	FMF-25	FMF50S	FMF-50	FMFIWS	FMFI00	FMF2WS	FMF200	FMF3WS
Power Rating at 70°C	1/4W	1/2W		1W		2W		3W
Maximum Working Voltage	250V	300V	350V	400V	500V			
Maximum Overload Voltage	500V	600V	700V	800V	1,000V			
Dielectric Withstanding Voltage	400V		500V	600V	750V			
Resistance Range	1 Ω - 10M Ω & 0 Ω for E24 & E96 series value							
Operating Temp. Range	-55°C to +155°C							
Temperature Coefficient	±50ppm/°C, ±100ppm/°C							

Note: Special value is available on request

## ENVIRONMENTAL CHARACTERISTICS

PERFORMANCE TEST	TEST METHOD	APPRAISE
Short Time Overload	JIS-C-5202 5.5 2.5 times RCWV for 5 Sec.	±0.25%+0.05 Ω
Dielectric Withstanding Voltage	JIS-C-5202 5.7 in V-Block for 60 Sec.	By type
Temperature Coefficient	JIS-C-5202 5.2 -55°C to +155°C	By type
Insulation Resistance	JIS-C-5202 5.6 in V-Block	> 1,000M Ω
Solderability	JIS-C-5202 6.5 260±5°C for 5±0.5 Sec.	95% Min. coverage
Resistance to Solvent	JIS-C-5202 6.9 IPA for 1 Min. with ultrasonic	No deterioration of coatings and markings
Terminal Strength	JIS-C-5202 6.1 Direct load for 10 Sec. in the direction of the terminal leads	≥2.5kg (24.5N)
Pulse Overload	JIS-C-5202 5.8 4 times RCWV 10,000 cycles (1 Sec. on, 25 Sec. off)	±1.0%+0.05 Ω
Load Life in Humidity	JIS-C-5202 7.9 40±2°C, 90-95% RH at RCWV for 1,000 Hr. (1.5 Hr. on, 0.5 Hr. off)	±1.5%+0.05 Ω
Load Life	JIS-C-5202 7.10 70°C at RCWV for 1,000 Hr. (1.5 Hr. on, 0.5 Hr. off)	±1.5%+0.05 Ω
Temperature Cycling	JIS-C-5202 7.4 -55°C ⇄ Room Temp. ⇄ +155°C ⇄ Room Temp. (5 cycles)	±0.75%+0.05 Ω
Resistance to Soldering Heat	JIS-C-5202 6.4 350±10°C for 3±0.5 Sec.	±0.25%+0.05 Ω
Overload Flame Retardant	JIS-C-5202 7.12 4 times RCWV for 1 Min.	No evidence of flaming or arcing

Note: Rated Continuous Working Voltage (RCWV) =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$